

537,424

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number
WO 2004/052465 A1

(51) International Patent Classification⁷: **A62B 35/04**

(21) International Application Number:
PCT/GB2003/005313

(22) International Filing Date: 5 December 2003 (05.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0228524.5 6 December 2002 (06.12.2002) GB

(71) Applicant (for all designated States except US): LATCH-
WAYS PLC [GB/GB]; Hopton Park, Devizes, Wiltshire
SN10 2JP (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): JONES, Karl

[GB/GB]; Latchways PLC, Hopton Park, Devizes, Wilt-
shire SN10 2JP (GB). FLUX, Peter [GB/GB]; Latchways
Plc, Hopton Park, Devizes, Wiltshire SN10 2JP (GB).


(74) Agent: REES, Alexander, Ellison; Urquhart-Dykes &
Lord LLP, 30 Welbeck Street, London W1G 8ER (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,
YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: SAFETY LINE TRAVELLER AND SUPPORT

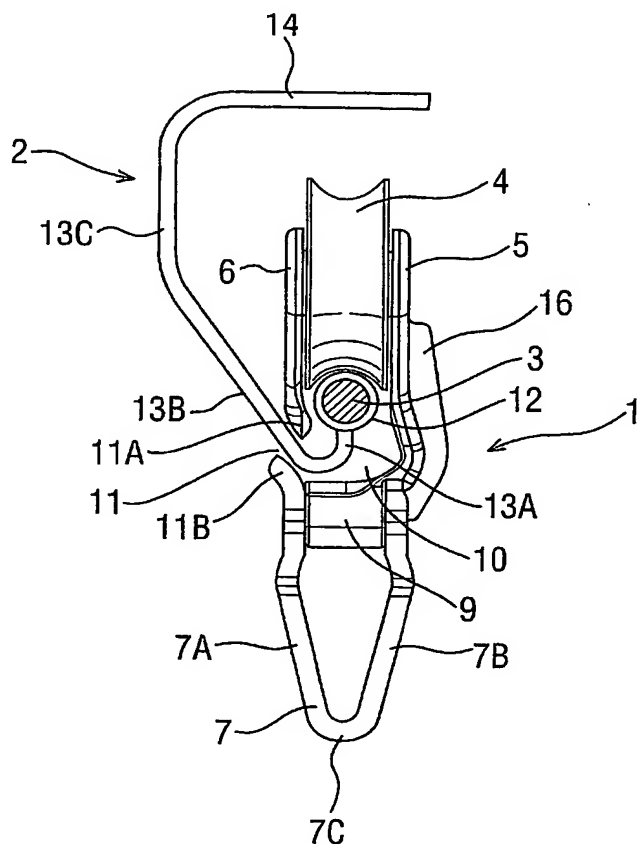

(57) **Abstract:** A traveller for a fall arrest system com-
prises a body having a passage therethrough, a slot nar-
rower than the passage linking the passage to the exte-
rior of the body, and a load member suitable to attach the
traveller to fall safety equipment. The slot is formed be-
tween an inner gate extending outwardly relative to the
passage and an outer gate extending inwardly relative to
the passage, the inner gate and outer gate having respec-
tive opposed convex surfaces defining the slot between
them. The traveller is arranged such that when the trav-
eller is mounted on a support the inner gate and outer gate
lie on a common radius of respective concentric circles
about the support.

WO 2004/052465 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG):

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*